DIRECT GROUND FIXING METALLIC HANDBALL GOAL




DESCRIPTION.

It is manufactured according to **UNE EN 749 regulation** and designed for be installed in any exterior surface.

Structurally, it is formed by the frame, the 350 mm anchorage (detail) and the stabilization and abatement system.

The frame is composed of a square crossbar and two square posts leaving inside measures of (3x2) meters. At the back they have rods to hold the net.

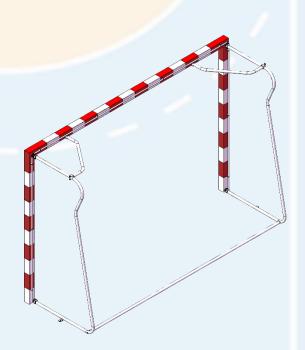

The stabilizer system is composed on the one hand of lateral supports (arches) attached to the frame at the top and bottom with a novel system formed by a metal die with screw that allows regulation to ensure the perpendicularity of the frame and fold the structure so that it occupies a minimum space in transport and packaging, and on the other hand, to ensure rigidity and stability, upper and lower stiffeners are placed between the arches.

All elements except the frame are rounded to avoid unnecessary physical hazards.

Ref.	Finish	Dimensions (m)	W	Weight (Kg)	
EBM002	Fully painted (without stickers)	1 bag of 0,15x2,08x3,16		61	




In order to constantly improve the quality of our products, Euronix reserves the right to modify any of the technical characteristics.

DIRECT GROUND FIXING METALLIC HANDBALL GOAL



Anchorage detail.

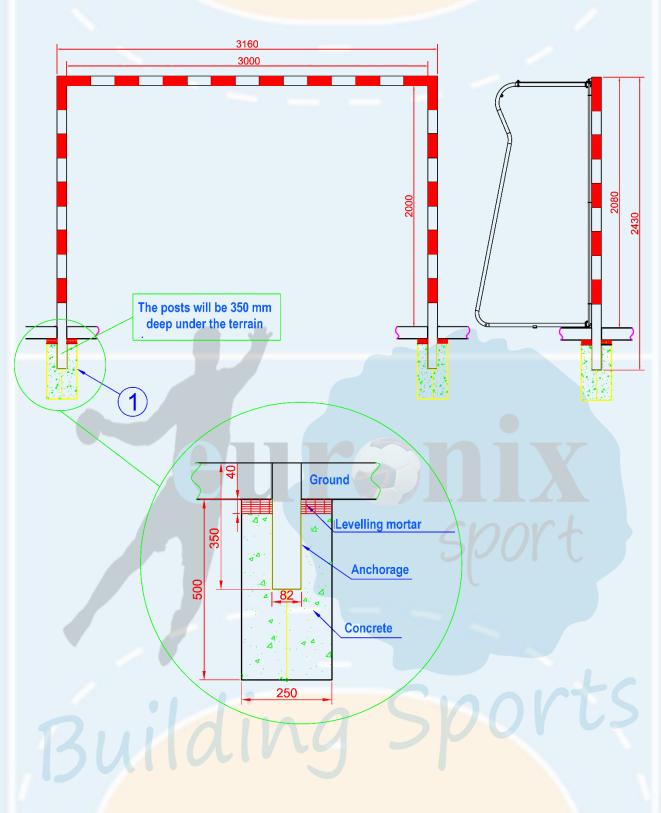

In order to constantly improve the quality of our products, Euronix reserves the right to modify any of the technical characteristics.